


Shut-off damper, fastrunning motor

DTFU



Dimensions

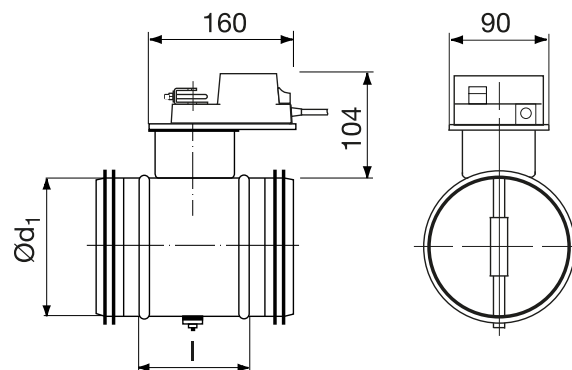

Description

Shut-off damper with electric motor LMQ 24A or LMQ 24A-SR.

Consists of a DTU damper with a 24 V electric motor added.

1. Motor LMQ 24A is a fast-running reversing on/off-motor, suitable for extraction at working places where a fast operation is wanted.
2. Motor LMQ 24A-SR is a fast-running modulating motor, suitable for laboratory extraction where a fast change of the air flow is wanted.

The motor stops at its end position and is not damaged by blockage, although system voltage remains. In outdoor installations, the motor must be protected from rain and direct UV radiation.

The motor is installed at a distance from the damper, which makes it easy to insulate the ventilation duct.

There is a separate assembly, measuring, balancing and maintenance instruction for this product.

Ø 80–250 fulfills pressure class C in closed position.

Ød _{1 nom} mm	l mm	m kg	Sealing class past closed blade
80	100	1,57	4
100	100	1,66	4
125	100	1,77	4
160	100	1,92	4
200	100	2,30	4
250	100	2,79	4

Order code

Product	DTFU
Dimension Ød ₁	125
Voltage	24
Motor type	LMQ 24A

Order example: DTFU-125-24-LMQ 24A

Shut-off damper, fastrunning motor

DTFU

Technical data

Parameter	LMQ 24A	LMQ-SR 24A
Power supply	AC 19,2-28,8 V, 50/60 Hz DC 21,6-28,8 V	AC 19,2-28,8 V, 50/60 Hz DC 21,6-28,8 V
Power consumption	13 W	12 W
For wire sizing	12 VA	23 VA
Connection	Cable 1 m, 3×0,75 mm ²	Cable 1 m, 4×0,75 mm ²
Operating angle	Max. 95°, adjustable 0-100 %	Max. 95°, adjustable 0-100 %
Torque at rated voltage	Min. 4 Nm	Min. 4 Nm
Position indication	Mechanical	Mechanical
Direction of rotation	Switch selectable 0  or 1 	Switch selectable 0  or 1 
Running time for 90°	2,5 s	2,5 s
Sound power level	52 dB(A)	52 dB(A)
Protection class	III Safety extra-low voltage	II Safety insulated
Protection class	IP 54	IP 54