

Circular sound attenuator

SLBGU



Technical data

To select the appropriate attenuator and optimise connection size and length to achieve the best performance please use our online tool LindQST.

[SLBGU on LindQST >>](#)

Description

SLBGU is a circular straight silencer with centre splitter.

Nominal insulation thickness is 100 mm provided with 100 mm thick baffle. This gives very good attenuation across the entire range. Used when the acoustic requirements exceed the performance capabilities of the SLGU. Especially suitable for large dimensions.

Attenuation material is mineral wool. The SLGBU is made of a strong outer spiral seemed tube and an inner tube made of steel with small openings to be able to withstand mechanical cleaning and at the same time not interfere with the insertion loss. The space between them is filled with mineral wool and a nonwoven cloth is inserted between the inner tube and the attenuation material, to prevent fibres from the insulation getting into the duct system.

The silencer can be cleaned by rotating nylon brushes, vacuum cleaner or damp cloth.

Technical data for insertion loss, pressure drop and self-generated noise is based on tests conducted in accordance with ISO 7235.

Special materials and sizes, please contact Lindab sales.

Order code

Product	SLBGU
Connection ($\varnothing d_{nom}$) in mm	315
Length (l_{nom}), in mm	1200
Insulation thickness in mm	100

Order example: SLBGU-315-1200-100


Circular sound attenuator

SLBGU

Dimensions and sound data


$\varnothing \leq 315$

Sizes ≤ 315 are supplied with preinstalled Safe-connectors.

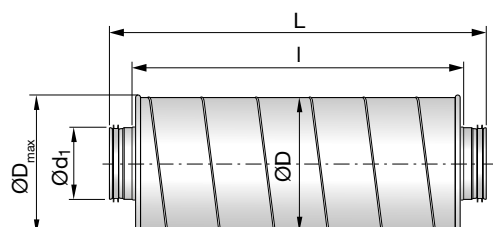

$\varnothing \geq 400$

Size ≥ 400 is supplied with loose NPU-couplings.

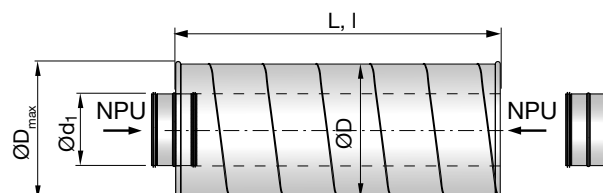

Insertion loss [dB] for centre frequency [Hz]														
$\varnothing d_{1 \text{ nom}}$ mm	l_{nom} mm	63	125	250	500	1k	2k	4k	8k	$\varnothing D_{\text{max}}$ mm	$\varnothing D$ mm	l_{nom} mm	L mm	m kg
315	900	6	9	20	34	39	44	34	22	508	500	900	1015	25,5
315	1200	7	12	27	39	50	50	45	27	508	500	1200	1315	33,6
400	900	4	6	13	22	24	26	20	17	615	600	900	900	29,9
400	1200	6	9	19	29	33	35	24	19	615	600	1200	1200	39,5
400	1500	7	12	25	38	42	44	29	22	615	600	1500	1500	48,7
500	900	4	6	13	17	19	19	12	12	615	600	900	900	34,3
500	1200	4	8	19	24	26	26	17	15	725	710	1200	1200	45,1
500	1500	4	9	25	31	33	33	20	18	725	710	1500	1500	55,7
630	900	3	4	10	12	14	12	10	10	725	710	900	900	43,2
630	1200	3	7	14	17	18	17	12	12	877	850	1200	1200	56,7
630	1500	4	8	19	23	23	20	14	14	877	850	1500	1500	69,9
800	1200	2	4	11	12	13	11	9	8	1025	1000	1200	1200	74,3
800	1500	2	5	15	17	16	14	10	9	1025	1000	1500	1500	91,6