



Spiral duct

SR



Description

Circular spiral duct.


Galvanised as standard, stainless steel or perforated tube is available on request.

Non-standard lengths are available on request and will be charged at a per m rate.

Diameters 180, 224, 280 and 600 mm are only available to special order.

Ducts are produced locally and can therefore have different thicknesses and other specifications per country.

Dimensions

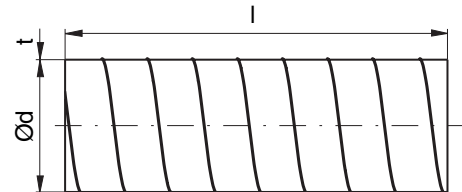

Ød std nom	O πd m	A $\pi d^2/4$ m ²	t std [mm]	l std [mm]	ml std kg/m
80	0.251	0.005	0.5	3000	1.14
100	0.314	0.008	0.5	3000	1.43
125	0.393	0.012	0.5	3000	1.79
150	0.471	0.018	0.5	3000	2.08
160	0.503	0.020	0.5	3000	2.29
180	0.565	0.025	0.6	3000	3.09
200	0.628	0.031	0.6	3000	3.39
224	0.704	0.039	0.6	3000	3.81
250	0.785	0.049	0.6	3000	4.30
280	0.880	0.062	0.6	3000	4.81
300	0.942	0.071	0.6	3000	5.16
315	0.990	0.078	0.6	3000	5.41
355	1.115	0.099	0.8	3000	8.13
400	1.257	0.126	0.8	3000	9.17
450	1.414	0.159	0.8	3000	10.31
500	1.571	0.196	0.8	3000	11.46
560	1.759	0.246	0.8	3000	12.83
600	1.885	0.283	0.8	3000	13.68
630	1.979	0.312	0.8	3000	14.32
710	2.231	0.396	0.8	3000	16.26
800	2.513	0.503	0.8	3000	18.33
900	2.827	0.636	1.0	3000	25.59
1000	3.142	0.785	1.0	3000	28.43
1120	3.519	0.985	1.0	3000	33.14
1250	3.927	1.227	1.0	3000	36.96
1422	4.398	1.539	1.0	2400	42.09
1500	4.712	1.767	1.0	2400	44.01
1600	5.027	2.011	1.2	2400	60.39

Ordering example

	SR	200	3000
Product			
Dimension Ød			
Length l			

