



Low Profile Box Fan

ELSSDL



Overview

Singleflow SSDL fans are suitable for external mounting. The range incorporates advanced backward curved impellers.

- 8 standard sizes from 100mm to 500mm
- Air volume flow rates up to 1.820 m³/s
- Static pressures up to 910 Pa
- Suitable for operating temperatures up to +60°C
- Suitable for External Mounting
- Acoustically lined as standard
- Configurable with optional terminal box and spigot type



sales@lindab.co.uk



W00-04-03

We reserve the right to make changes without prior notice
2026-07-22



Low Profile Box Fan

ELSSDL

Easy Installation

All models are designed for direct connection to standard diameter flexible or rigid circular ducting with long spigots.

Easy Commissioning

Integrated commissioning control allows single speed selection and also limits maximum speed if used with an external potentiometer.

Efficient Performance

High efficiency low tonal noise backward curved centrifugal impellers are directly driven by an EC external rotor motor, provide low specific fan powers and stepless speed control without tonal noise generation.

Controllability

EC motors provide precise speed control via potentiometer or BMS. Reduced fan speeds can provide significant cost-savings through lower energy consumption in both mechanical energy of motors and also on the conditioning of replacement air.

Construction

Robust 1.2mm galvanised mild steel sheet casing. The casing is specially manufactured using integral motor mounting plates to provide additional rigidity for the casings. Each casing provides spigots to suit standard circular ducting.

Motor

EC external rotor motor fitted as standard. The IP44 motor contains sealed for life bearings. All motors are suitable for use in ambient air conditions up to +60°C.

Impeller

High efficiency low tonal noise backward curved centrifugal impeller, dynamically balanced to ISO1940-1 and directly driven by the motor to provide a smooth airflow through the unit.

Duct Connection Options

Can be supplied with rectangular outlet & inlet spigots on request.

Electrical Connection Options

Electrical cable entry from either side for ease of electrical connection as standard (a terminal box pre-fitted to either side can be ordered).

Typical Applications

- Toilets
- Hotels
- Schools
- Colleges
- Libraries
- Kitchens
- Factories
- Industrial Units
- Warehousing
- Offices

Warranty

Each SH has a 12 month warranty.



sales@lindab.co.uk

W00-04-03


We reserve the right to make changes without prior notice

2026-07-22



Centrifugal Box Fan

ELSSDL

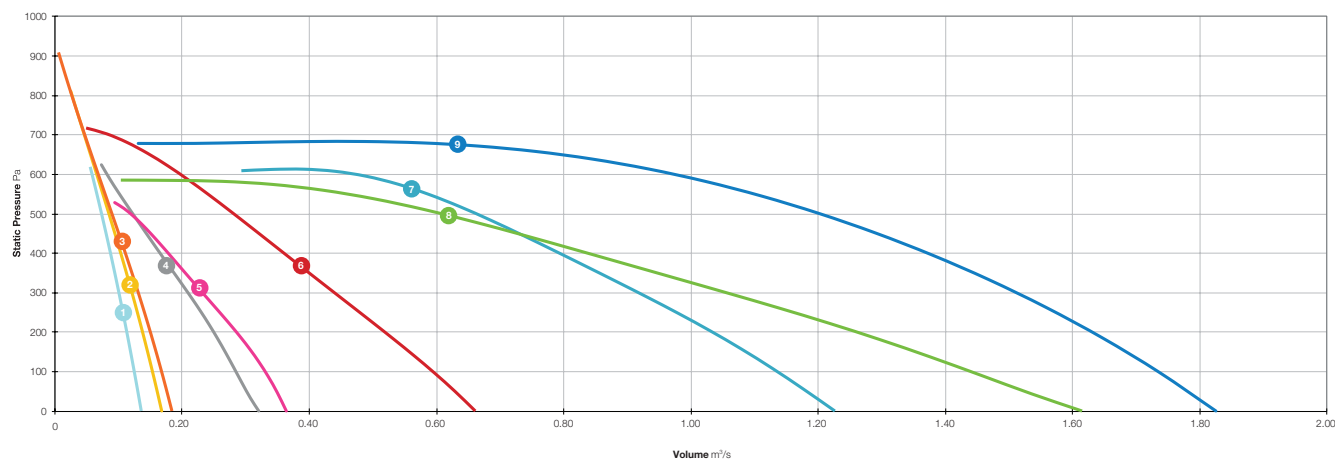

- 1 ELSSDL100 / 1EC
- 2 ELSSDL125 / 1EC
- 3 ELSSDL150 / 1EC

- 4 ELSSDL200 / 1EC
- 5 ELSSDL250 / 1EC
- 6 ELSSDL315 / 1EC

- 7 ELSSDL400 / 1EC
- 8 ELSSDL500 / 1EC
- 9 ELSSDL500 / 3EC



sales@lindab.co.uk

W00-04-03

We reserve the right to make changes without prior notice

2026-07-22





Low Profile Box Fan

ELSSDL

Performance, SFP & Electrical Data

Single Phase 220V to 240V/ 50Hz or 60Hz

Product Code	Control Voltage V	Speed r/min	Airflow SFP	Airflow m³/s @ Static Pressure Pa												At Best Efficiency Point		Electrical Data		dBA @ 3m	
				0	25	50	75	100	150	200	250	300	350	400	500	Overall Eff %	Input kW	Peak Amps			
ELSSDL100-1 EC	10	3665	m³/s	0.135	0.132	0.129	0.126	0.124	0.118	0.112	0.106	0.100	0.093	0.086	0.072	31.9	0.113	0.97	Inlet	54	
			W/(L/s)	0.83	0.84	0.86	0.88	0.90	0.95	1.00	1.06	1.13	1.21	1.31	1.57				Outlet	56	
			Breakout																47		
	7.5	3205	m³/s	0.125	0.122	0.119	0.116	0.113	0.106	0.099	0.092	0.085	0.078	0.070	-	33.2	0.085	-	Inlet	51	
			W/(L/s)	0.65	0.66	0.68	0.70	0.72	0.76	0.81	0.88	0.96	1.07	1.21	-				Outlet	53	
			Breakout																39		
	5	2455	m³/s	0.096	0.092	0.088	0.083	0.079	0.070	0.061	0.051	0.040	-	-	-	27.4	0.046	-	Inlet	46	
			W/(L/s)	0.46	0.48	0.51	0.53	0.56	0.63	0.74	0.92	1.22	-	-	-				Outlet	47	
			Breakout																31		
	2.5	1495	m³/s	0.058	0.051	0.044	0.036	-	-	-	-	-	-	-	-	24.6	0.012	-	Inlet	36	
			W / (L/s)	0.19	0.22	0.25	0.31	-	-	-	-	-	-	-	-				Outlet	38	
			Breakout																25		
ELSSDL125-1 EC	10	3555	m³/s	0.167	0.163	0.160	0.156	0.152	0.145	0.137	0.129	0.120	0.111	0.103	0.084	37.4	0.113	0.97	Inlet	53	
			W/(L/s)	0.67	0.69	0.70	0.72	0.73	0.77	0.82	0.87	0.93	1.00	1.09	1.34				Outlet	54	
			Breakout																45		
	7.5	3205	m³/s	0.155	0.151	0.147	0.143	0.139	0.131	0.122	0.112	0.103	0.093	0.082	0.062	40.2	0.082	-	Inlet	50	
			W/(L/s)	0.52	0.54	0.55	0.57	0.58	0.62	0.66	0.72	0.79	0.88	1.00	1.42				Outlet	51	
			Breakout																37		
	5	2455	m³/s	0.119	0.114	0.108	0.103	0.097	0.085	0.072	0.059	0.045	0.032	-	-	33.0	0.045	-	Inlet	44	
			W/(L/s)	0.37	0.39	0.41	0.43	0.46	0.52	0.61	0.77	1.05	1.60	-	-				Outlet	45	
			Breakout																29		
	2.5	1495	m³/s	0.072	0.064	0.054	0.043	0.032	-	-	-	-	-	-	-	29.6	0.011	-	Inlet	34	
			W/(L/s)	0.16	0.18	0.21	0.26	0.36	-	-	-	-	-	-	-				Outlet	36	
			Breakout																23		
ELSSDL150-1 EC	10	3480	m³/s	0.184	0.180	0.176	0.172	0.168	0.159	0.150	0.141	0.131	0.121	0.111	0.090	48.7	0.112	0.97	Inlet	51	
			W/(L/s)	0.61	0.63	0.64	0.65	0.67	0.70	0.74	0.79	0.85	0.92	1.01	1.25				Outlet	52	
			Breakout																41		
	7.5	3205	m³/s	0.171	0.167	0.163	0.158	0.154	0.144	0.134	0.123	0.112	0.100	0.088	0.065	43.6	0.082	-	Inlet	49	
			W/(L/s)	0.47	0.49	0.50	0.51	0.53	0.56	0.61	0.66	0.72	0.81	0.92	1.33				Outlet	50	
			Breakout																36		
	5	2455	m³/s	0.131	0.126	0.120	0.114	0.107	0.093	0.078	0.063	0.048	0.034	0.021	-	35.8	0.045	-	Inlet	44	
			W/(L/s)	0.34	0.35	0.37	0.39	0.42	0.48	0.56	0.71	0.99	1.54	2.77	-				Outlet	44	
			Breakout																28		
	2.5	1225	m³/s	0.080	0.070	0.059	0.047	0.034	-	-	-	-	-	-	-	32.1	0.011	-	Inlet	33	
			W/(L/s)	0.14	0.16	0.19	0.24	0.33	-	-	-	-	-	-	-				Outlet	35	
			Breakout																22		
ELSSDL200-1 EC	10	2410	m³/s	0.319	0.311	0.302	0.294	0.285	0.267	0.249	0.229	0.209	0.188	0.166	0.121	48.9	0.156	1.15	Inlet	54	
			W/(L/s)	0.51	0.52	0.53	0.54	0.56	0.59	0.63	0.68	0.74	0.83	0.94	1.29				Outlet	55	
			Breakout																39		
	7.5	2305	m³/s	0.268	0.263	0.258	0.252	0.247	0.234	0.219	0.202	0.184	0.162	0.135	-	43.7	0.130	-	Inlet	49	
			W/(L/s)	0.37	0.39	0.41	0.43	0.45	0.50	0.56	0.63	0.71	0.80	0.93	-				Outlet	50	
			Breakout																35		
	5	1540	m³/s	0.178	0.171	0.162	0.152	0.141	0.112	-	-	-	-	-	-	43.6	0.038	-	Inlet	42	
			W/(L/s)	0.16	0.18	0.21	0.23	0.26	0.35	-	-	-	-	-	-				Outlet	42	
			Breakout																25		
	2.5	770	m³/s	0.089	0.070	-	-	-	-	-	-	-	-	-	-	43.6	0.005	-	Inlet	23	
			W / (L/s)	0.04	0.07	-	-	-	-	-	-	-	-	-	-				Outlet	25	
			Breakout																11		

Data provided is at standard air density of 1.2 kg/m³.

ErP data in accordance with Regulation (EU) 1253/2014. Product category is NRVU. Measurement category used to determine energy efficiency: D. Peak Amps @ 230V / 1PH / 50Hz.

A variable speed drive is integrated within the fan.

Tests and preparation of the sound data have been carried out in accordance with BS 848 Part 2:1985 at 50% peak pressure.

The overall A-weighted sound pressure level is at a distance of 3m with spherical free-field propagation. It is expressed in dB re-20µPa and is presented for comparative purposes only. Silencer attenuation and pressure drop values calculated at 50% peak pressure.



Low Profile Box Fan

ELSSDL

Performance, SFP & Electrical Data

Single Phase 220V to 240V/ 50Hz or 60Hz

Product Code	Control Voltage V	Speed r/min	Airflow SFP	Airflow m³/s @ Static Pressure Pa												At Best Efficiency Point		Electrical Data		dBA @ 3m	
				0	25	50	75	100	150	200	250	300	350	400	500	Overall Eff %	Input kW	Peak Amps			
ELSSDL250-1 EC	10	2545	m³/s	0.363	0.355	0.347	0.339	0.329	0.309	0.284	0.258	0.231	0.204	0.178	0.119	42.3	0.167	1.15	Inlet	52	
			W/(L/s)	0.44	0.46	0.48	0.50	0.52	0.57	0.63	0.69	0.77	0.85	0.95	1.28				Outlet	53	
			Breakout												Breakout				37		
	7.5	2280	m³/s	0.304	0.297	0.290	0.283	0.275	0.259	0.242	0.222	0.199	0.171	0.116	-	42.6	0.141	-	Inlet	48	
			W/(L/s)	0.31	0.34	0.37	0.41	0.44	0.50	0.57	0.64	0.72	0.82	1.04	-				Outlet	49	
			Breakout												Breakout				33		
	5	1485	m³/s	0.198	0.187	0.176	0.163	0.149	0.110	-	-	-	-	-	-	43.7	0.038	-	Inlet	39	
			W/(L/s)	0.14	0.17	0.19	0.23	0.26	0.34	-	-	-	-	-	-				Outlet	39	
			Breakout												Breakout				23		
	2.5	710	m³/s	0.094	0.067	-	-	-	-	-	-	-	-	-	-	44.5	0.004	-	Inlet	20	
			W/(L/s)	0.03	0.06	-	-	-	-	-	-	-	-	-	-				Outlet	21	
			Breakout												Breakout				8		
ELSSDL315-1 EC	10	2145	m³/s	0.660	0.645	0.628	0.611	0.593	0.556	0.518	0.478	0.438	0.399	0.359	0.280	39.8	0.405	1.62	Inlet	65	
			W/(L/s)	0.61	0.62	0.64	0.66	0.68	0.72	0.77	0.84	0.92	1.01	1.13	1.44				Outlet	62	
			Breakout												Breakout				41		
	7.5	1940	m³/s	0.580	0.566	0.551	0.535	0.519	0.483	0.442	0.398	0.351	0.303	0.256	0.163	37.1	0.322	-	Inlet	60	
			W/(L/s)	0.45	0.47	0.50	0.52	0.55	0.62	0.70	0.80	0.92	1.06	1.23	1.76				Outlet	61	
			Breakout												Breakout				39		
	5	1290	m³/s	0.387	0.365	0.340	0.311	0.279	0.209	0.140	0.057	-	-	-	-	38.4	0.095	-	Inlet	50	
			W/(L/s)	0.20	0.22	0.25	0.29	0.33	0.45	0.64	1.22	-	-	-	-				Outlet	48	
			Breakout												Breakout				39		
	2.5	645	m³/s	0.194	0.140	0.070	-	-	-	-	-	-	-	-	-	40.4	0.012	-	Inlet	36	
			W/(L/s)	0.05	0.08	0.16	-	-	-	-	-	-	-	-	-				Outlet	35	
			Breakout												Breakout				19		
ELSSDL400-1 EC	10	1620	m³/s	1.226	1.204	1.182	1.159	1.136	1.087	1.034	0.977	0.918	0.856	0.794	0.664	50.0	0.754	5.19	Inlet	58	
			W/(L/s)	0.62	0.63	0.64	0.65	0.66	0.69	0.73	0.77	0.82	0.87	0.94	1.14				Outlet	60	
			Breakout												Breakout				43		
	7.5	1445	m³/s	1.054	1.036	1.018	0.998	0.977	0.932	0.881	0.823	0.754	0.667	0.530	-	45.0	0.537	-	Inlet	55	
			W/(L/s)	0.46	0.48	0.49	0.51	0.53	0.57	0.62	0.67	0.74	0.82	0.94	-				Outlet	55	
			Breakout												Breakout				39		
	5	960	m³/s	0.701	0.673	0.642	0.607	0.566	0.457	-	-	-	-	-	-	45.0	0.158	-	Inlet	47	
			W/(L/s)	0.20	0.22	0.24	0.26	0.29	0.35	-	-	-	-	-	-				Outlet	45	
			Breakout												Breakout				32		
	2.5	480	m³/s	0.350	0.283	-	-	-	-	-	-	-	-	-	-	45.0	0.020	-	Inlet	36	
			W/(L/s)	0.05	0.07	-	-	-	-	-	-	-	-	-	-				Outlet	35	
			Breakout												Breakout				25		
ELSSDL500-1 EC	10	1310	m³/s	1.615	1.568	1.525	1.483	1.440	1.354	1.262	1.162	1.056	0.947	0.838	0.609	50.1	0.735	5.07	Inlet	53	
			W/(L/s)	0.46	0.47	0.48	0.50	0.51	0.54	0.58	0.63	0.69	0.77	0.88	1.21				Outlet	56	
			Breakout												Breakout				41		
	7.5	1225	m³/s	1.447	1.412	1.377	1.340	1.302	1.220	1.131	1.030	0.914	0.771	0.567	-	49.4	0.607	-	Inlet	52	
			W/(L/s)	0.38	0.40	0.42	0.44	0.46	0.51	0.56	0.61	0.69	0.78	0.95	-				Outlet	54	
			Breakout												Breakout				39		
	5	900	m³/s	1.041	0.998	0.954	0.906	0.854	0.725	0.498	-	-	-	-	-	44.5	0.247	-	Inlet	46	
			W/(L/s)	0.20	0.22	0.25	0.27	0.29	0.35	0.46	-	-	-	-	-				Outlet	47	
			Breakout												Breakout				31		
	2.5	560	m³/s	0.638	0.561	0.465	0.321	-	-	-	-	-	-	-	-	38.4	0.077	-	Inlet	33	
			W/(L/s)	0.12	0.13	0.16	0.24	-	-	-	-	-	-	-	-				Outlet	35	
			Breakout												Breakout				23		

Data provided is at standard air density of 1.2 kg/m³.

ErP data in accordance with Regulation (EU) 1253/2014. Product category is NRVU. Measurement category used to determine energy efficiency: D. Peak Amps @ 230V / 1PH / 50Hz.

A variable speed drive is integrated within the fan.

Tests and preparation of the sound data have been carried out in accordance with BS 848 Part 2:1985 at 50% peak pressure.

The overall A-weighted sound pressure level is at a distance of 3m with spherical free-field propagation. It is expressed in dB re-20µPa and is presented for comparative purposes only. Silencer attenuation and pressure drop values calculated at 50% peak pressure.



Low Profile Box Fan

ELSSDL

Performance, SFP & Electrical Data

Three Phase 380V to 480V / 50Hz or 60Hz

Product Code	Control Voltage V	Speed r/min	Airflow SFP	Airflow m³/s @ Static Pressure Pa												At Best Efficiency Point		Electrical Data	dBA @ 3m	
				0	25	50	75	100	150	200	250	300	350	400	500	Overall Eff %	Input kW	Peak Amps		
ELSSDL500-3 EC	10	1555	m³/s	1.820	1.800	1.780	1.750	1.730	1.680	1.630	1.570	1.510	1.440	1.370	1.200	51.9	1.277	2.38	Inlet	58
			W/(L/s)	0.59	0.62	0.64	0.66	0.68	0.72	0.77	0.82	0.87	0.93	0.98	1.11				Outlet	61
															Breakout				49	
	7.5	1310	m³/s	1.555	1.522	1.489	1.456	1.422	1.353	1.279	1.199	1.107	0.997	0.853	-	49.2	0.769	-	Inlet	54
			W/(L/s)	0.42	0.44	0.47	0.49	0.51	0.56	0.60	0.66	0.72	0.79	0.89	-				Outlet	57
															Breakout				44	
	5	940	m³/s	1.104	1.059	1.011	0.962	0.909	0.785	0.609	-	-	-	-	-	45.0	0.307	-	Inlet	48
			W/(L/s)	0.24	0.27	0.29	0.32	0.34	0.40	0.50	-	-	-	-	-				Outlet	48
															Breakout				34	
	2.5	585	m³/s	0.678	0.602	0.510	0.383	-	-	-	-	-	-	-	-	34.9	0.096	-	Inlet	34
			W / (L/s)	0.13	0.16	0.19	0.25	-	-	-	-	-	-	-	-				Outlet	36
															Breakout				22	

Data provided is at standard air density of 1.2 kg/m³.

ErP data in accordance with Regulation (EU) 1253/2014. Product category is NRVU. Measurement category used to determine energy efficiency: D.

A variable speed drive is integrated within the fan.

Peak Amps @ 400V / 3PH / 50Hz.

Tests and preparation of the sound data have been carried out in accordance with BS 848 Part 2:1985 at 50% peak pressure.

The overall A-weighted sound pressure level is at a distance of 3m with spherical free-field propagation. It is expressed in dB re-20µPa and is presented for comparative purposes only. Silencer attenuation and pressure drop values calculated at 50% peak pressure.



sales@lindab.co.uk

W00-04-03

We reserve the right to make changes without prior notice

2023-07-26





Low Profile Box Fan

ELSSDL

Sound Data

Single Phase 220V to 240V / 50Hz or 60Hz

Product Code	Control Voltage V	Speed r/min		Sound Power Level dBW @ Octave Band Hz								Total dB
				63Hz	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	
ELSSDL100-1E	10	3665	Inlet	73	80	76	74	66	63	62	62	83
			Outlet	78	79	77	76	70	63	59	57	84
			Breakout	60	59	58	70	51	45	41	38	71
	7.5	3205	Inlet	73	78	75	70	63	60	60	58	81
			Outlet	75	77	76	72	67	60	56	55	82
			Breakout	58	61	58	61	50	42	38	35	66
	5	2455	Inlet	67	71	72	63	57	54	55	48	76
			Outlet	71	72	72	65	60	54	51	45	77
			Breakout	47	50	58	49	41	36	33	26	59
	2.5	1495	Inlet	58	64	62	52	45	47	36	29	67
			Outlet	61	69	63	54	48	45	34	25	71
			Breakout	36	47	53	41	30	28	20	18	54
ELSSDL125-1E	10	3555	Inlet	72	79	74	72	64	62	62	62	82
			Outlet	77	78	75	74	68	62	59	57	83
			Breakout	59	58	56	68	49	44	41	38	69
	7.5	3205	Inlet	72	77	73	68	61	59	60	58	80
			Outlet	74	76	74	70	65	59	56	55	80
			Breakout	57	60	56	59	48	41	38	35	64
	5	2455	Inlet	66	70	70	61	55	53	55	48	74
			Outlet	70	71	70	63	58	53	51	45	76
			Breakout	46	49	56	47	39	35	33	26	58
	2.5	1495	Inlet	57	63	60	50	43	46	36	29	66
			Outlet	60	68	61	52	46	44	34	25	69
			Breakout	35	46	51	39	28	27	20	18	53
ELSSDL150-1E	10	3480	Inlet	72	77	73	70	63	61	62	61	80
			Outlet	76	76	74	72	67	61	58	57	81
			Breakout	59	57	55	64	49	43	40	37	66
	7.5	3205	Inlet	72	75	72	67	61	59	60	58	79
			Outlet	74	74	73	69	65	59	56	55	79
			Breakout	57	58	55	58	48	41	38	35	63
	5	2455	Inlet	66	68	69	60	55	53	55	48	73
			Outlet	70	69	69	62	58	53	51	45	75
			Breakout	46	47	55	46	39	35	33	26	57
	2.5	1225	Inlet	57	61	59	49	43	46	36	29	64
			Outlet	60	66	60	51	46	44	34	25	68
			Breakout	35	44	50	38	28	27	20	18	51
ELSSDL200-1E	10	2410	Inlet	79	76	79	71	66	62	60	59	83
			Outlet	80	80	79	73	69	64	58	52	85
			Breakout	61	63	65	56	53	44	40	35	68
	7.5	2305	Inlet	74	73	75	67	61	57	56	55	79
			Outlet	74	74	75	68	64	59	54	47	80
			Breakout	58	63	62	51	48	39	35	30	66
	5	1540	Inlet	67	72	66	59	51	47	54	35	74
			Outlet	66	72	67	59	53	49	48	32	74
			Breakout	42	56	50	43	37	28	28	17	57
	2.5	770	Inlet	58	54	48	39	32	27	27	22	60
			Outlet	57	56	50	40	34	27	23	20	60
			Breakout	32	37	37	27	22	16	16	13	41
ELSSDL250-1E	10	2545	Inlet	77	74	77	69	65	62	60	59	81
			Outlet	78	78	77	71	68	64	58	52	83
			Breakout	59	61	63	54	52	44	40	35	67
	7.5	2280	Inlet	71	71	73	65	60	57	56	54	77
			Outlet	71	72	73	66	63	59	53	47	77
			Breakout	56	60	59	49	47	39	34	29	64
	5	1485	Inlet	64	69	63	56	49	46	52	34	71
			Outlet	63	69	64	56	51	48	46	31	71
			Breakout	39	53	47	40	35	27	27	17	54
	2.5	710	Inlet	56	51	45	35	29	25	25	21	57
			Outlet	55	52	46	36	32	25	21	19	57
			Breakout	29	34	34	23	20	15	15	13	38

Data provided at standard air density of 1.2 kg/m³.
Tests and preparation of the sound data have been carried out in accordance with BS 848 Part 2:1985 at 50% peak pressure. The Sound Power Level Spectra are in dB re-1pW.

W00-04-03

We reserve the right to make changes without prior notice

2026-07-22



Low Profile Box Fan

ELSSDL

Sound Data

Single Phase 220V to 240V / 50Hz or 60Hz

Product Code	Control Voltage V	Speed r/min		Sound Power Level dBW @ Octave Band Hz								Total dB
				63Hz	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	
ELSSDL315-1EC	10	2145	Inlet	82	85	94	75	69	66	64	59	95
			Outlet	81	85	90	78	72	69	63	55	92
			Breakout	59	69	66	61	51	45	41	36	72
	7.5	1940	Inlet	81	85	89	72	67	64	61	56	91
			Outlet	80	84	89	77	70	66	61	52	91
			Breakout	57	71	63	58	49	43	39	33	72
	5	1290	Inlet	78	85	70	62	57	54	51	44	86
			Outlet	77	79	72	64	60	55	49	39	82
			Breakout	53	75	53	47	40	33	28	24	75
	2.5	645	Inlet	79	64	58	48	44	40	39	23	79
			Outlet	75	65	59	51	47	40	33	21	76
			Breakout	52	49	42	37	32	19	16	15	54
ELSSDL400-1EC	10	1620	Inlet	83	83	83	77	67	66	68	66	88
			Outlet	84	83	86	76	73	69	67	62	90
			Breakout	63	67	69	62	55	50	49	44	72
	7.5	1445	Inlet	80	82	79	73	62	63	64	58	86
			Outlet	81	81	80	71	68	65	63	57	86
			Breakout	61	65	63	59	50	46	45	37	69
	5	960	Inlet	75	81	66	60	54	59	53	38	82
			Outlet	74	76	65	61	59	56	48	33	78
			Breakout	52	63	53	52	43	38	33	21	64
	2.5	480	Inlet	70	61	52	48	55	46	30	23	71
			Outlet	67	61	53	51	53	42	27	19	68
			Breakout	43	52	44	46	40	25	16	16	54
ELSSDL500-1EC	10	1310	Inlet	78	87	78	64	60	59	58	54	88
			Outlet	79	86	79	72	68	66	60	55	88
			Breakout	67	70	67	57	55	44	38	29	73
	7.5	1225	Inlet	77	86	76	62	58	58	57	52	87
			Outlet	78	85	77	70	67	64	58	53	87
			Breakout	66	69	64	55	53	43	37	26	72
	5	900	Inlet	73	81	65	54	50	51	47	40	82
			Outlet	73	80	68	62	58	55	50	42	81
			Breakout	61	64	55	47	40	33	28	18	66
	2.5	560	Inlet	73	65	54	47	41	44	34	35	74
			Outlet	72	65	56	52	46	46	37	36	73
			Breakout	60	51	47	41	33	25	22	26	61

Data provided at standard air density of 1.2 kg/m³.
Tests and preparation of the sound data have been carried out in accordance with BS 848 Part 2:1985 at 50% peak pressure.
The Sound Power Level Spectra are in dB re-1pW.



sales@lindab.co.uk

W00-04-03

We reserve the right to make changes without prior notice

2026-07-22





Low Profile Box Fan

ELSSDL

Sound Data

Three Phase 380V to 480V / 50Hz or 60Hz

Product Code	Control Voltage V	Speed r/min		Sound Power Level dBW @ Octave Band Hz								Total dB
				63Hz	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	
ELSSDL500-3 EC	10	1555	Inlet	81	81	87	66	62	63	61	59	89
			Outlet	82	82	88	77	71	68	63	58	90
			Breakout	70	65	78	65	51	51	47	43	79
	7.5	1310	Inlet	79	83	81	64	60	61	59	55	86
			Outlet	80	84	82	74	68	66	61	55	87
			Breakout	68	67	72	62	48	49	45	39	75
	5	940	Inlet	75	83	67	55	53	55	52	42	84
			Outlet	75	81	69	63	60	59	54	43	82
			Breakout	63	65	58	53	40	42	38	27	68
	2.5	585	Inlet	74	65	54	43	46	46	35	36	75
			Outlet	74	64	56	51	50	48	37	36	75
			Breakout	62	48	45	41	32	32	21	20	62

Data provided at standard air density of 1.2 kg/m³.
Tests and preparation of the sound data have been carried out in accordance with BS 848 Part 2:1985 at 50% peak pressure.
The Sound Power Level Spectra are in dB re-1pW.

Elta-UK has a policy of continuous product development and improvement and therefore reserves the right to supply products which may differ from those illustrated and described in this publication. Confirmation of dimensions and data will be supplied on request.



sales@lindab.co.uk

W00-04-03

We reserve the right to make changes without prior notice

2026-07-22






Low Profile Box Fan

ELSSDL

Dimensional Data

Product Code	A	B	C	D	E	F	G	H	J*	K*	"L (W/ TERM BOX)"	Weight Kg
SSDL100	504	354	261	97	10	294	559	599	148	198	B + 74	15
SSDL125	504	354	261	122		294	559	599	148	198		15
SSDL150	504	354	261	147		294	559	599	148	198		15
SSDL200	555	404	316	197		344	610	650	204	204		18
SSDL250	605	454	376	247		394	660	700	254	254		26
SSDL315	655	579	451	312		519	710	750	348	378		37
SSDL400	875	754	601	397		694	930	970	448	598		64
SSDL500	875	754	601	497		694	930	970	498	598		65

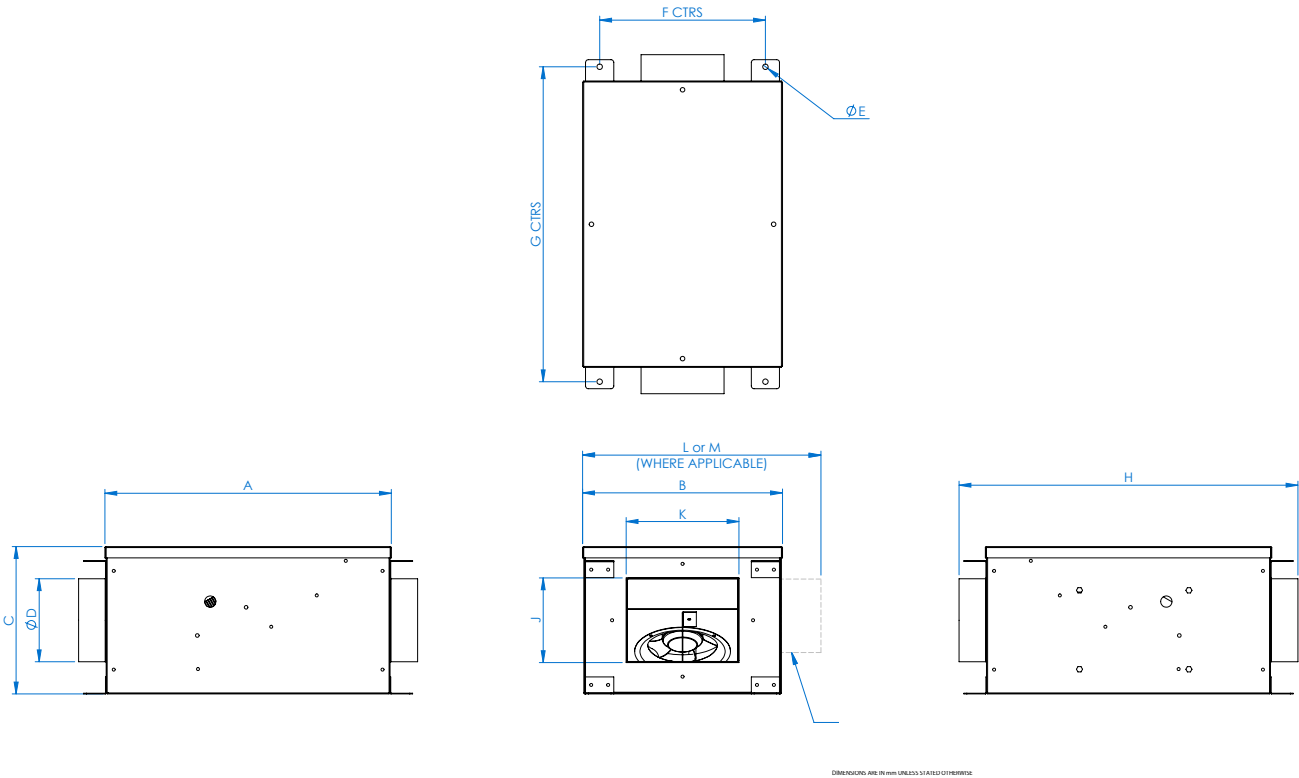

* Rectangular Spigot Versio
All dimensions are expressed in mm.